




reddot winner 2020
best of the best



reddot winner 2020
best innovative product

SOCKELPROFIL SLED16X5 SKIRTING PROFILE SLED16X5

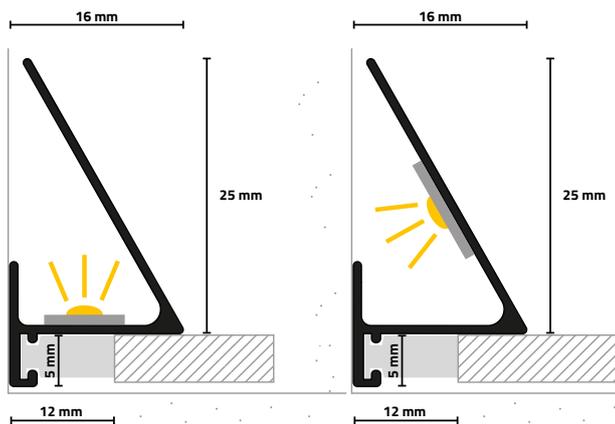

Das Sockelprofil SLED16X5 stellt einen dezenten und innovativen Abschluss von Bodenbelag zu Wand, Fenster(rahmen) oder Treppenstufe her - dort, wo Anschluss- und Dehnfugen bautechnisch eingehalten werden müssen. **Kompatibel mit LED-Stripes mit einer Breite von 8 - 12 mm - nicht im Lieferumfang enthalten.**

Geeignet für:
Parkett, Laminat, Designböden und Fliesen

Für Belagstärken:
Ab 5 mm

Breite Anschlussfuge:
5 - 13 mm

Montageart:
Clips (werkzeuglos)

Profillänge:
200 cm

Material:
Aluminium eloxiert

Beschichtung Dicke:
Klasse 15 (DIN EN 17611)

Kratz- und Verschleißfestigkeit:
Klasse 33 (DIN EN 13329)

Notwendiges Zubehör:
- Clips (CLIP5)
- Montagehilfe (MH100) - optional

*The SLED16X5 skirting profile creates a discreet and innovative finish from flooring to wall, window(frame) or stair step - wherever connection and expansion joints have to be observed in terms of construction. **Compatible with all LED strips with a width of 8 - 12 mm - not included in the scope of delivery.***

Suitable for:
Parquet, Laminate, design floors and tiles

For covering thicknesses:
From 5 mm

Wide connection joint:
5 - 13 mm

Mounting:
Clips (without tools)

Profile length:
200 cm

Material:
Anodized aluminum

Thickness of anodised layer:
Class 15 (DIN EN 17611)

Scratch and wear resistance:
Class 33 (DIN EN 13329)

Required accessories:
- Clips (CLIP5)
- Mounting aid (MH100) - optional

Silber seidennatt EV1
Silver silk matt EV1

Titan seidennatt C31
Titanium silk matt C31

Schwarz seidennatt C35
Black silk matt C35

Weiß feinstrukturiert RAL9016
White finely structured RAL 9016

Gold seidennatt EV3
Gold silk matt EV3

